



DIN 7983 Z - sim. ISO 7051

Tapping screws

raised countersunk head with cross recess Z (Pozidrive), type C (with cone point)

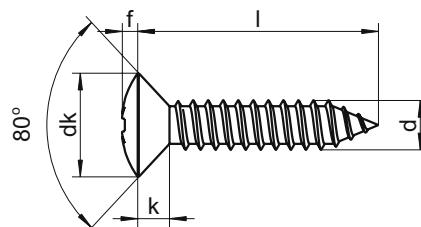

dk	4,3	5,5	6,8	7,5	8,1	9,5	10,8	12,4
f	0,7	0,9	1,2	1,3	1,4	1,5	1,7	2,0
k	1,3	1,7	2,1	2,3	2,5	3,0	3,4	3,8
\oplus	7,1	7,1	7,2	7,2	7,2	7,2	7,3	7,3
Length / \varnothing	ST2,2	ST2,9	ST3,5	ST3,9	ST4,2	ST4,8	ST5,5	ST6,3
6,5 (1/4")	▲●	▲●	▲●	▲●				
9,5 (3/8")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	
13 (1/2")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
16 (5/8")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
19 (3/4")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
22 (7/8")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
25 (1")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
32 (1 1/4")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
38 (1 1/2")		▲●	▲●	▲●	▲●	▲●	▲●	▲●
45 (1 3/4")			▲●	▲●	▲●	▲●	▲●	▲●
50 (2")			▲●	▲●	▲●	▲●	▲●	▲●
60 (2 3/8")				▲●	▲●	▲●	▲●	▲●
70 (2 3/4")				▲●	▲●	▲●	▲●	▲●
80 (3 3/8")					▲●	▲●	▲●	▲●
90 (3 1/2")						▲●	▲●	▲●
100 (4")						▲●	▲●	▲●
SU	1000	1000	1000 ≥ 32 500	1000 ≥ 32 500	1000 ≥ 32 500 ≥ 50 200	500 ≥ 32 200	200 ≥ 32 100	200 ≥ 32 100

■ A1 / ▲ A2 / ● A4 | SU: Sales units | All measurements in mm / inch | Other dimensions on request.

Example item no. 7983-2-4,2X38Z DIN 7983 - A2 - Ø 4,2mm - l = 38mm - pozidrive

Tapping screws with raised countersunk head DIN 7983, with dog point type F, with cutting groove type SB are available on request. Tapping screws with raised countersunk head DIN 7983, with different coatings or head varnishing are available on request. Slotted tapping screws with raised countersunk head can be found as DIN 7973, with TX as WS 9479 in this catalogue.