


# WS 9477 - sim. DIN 7981

## Tapping screws

pan head with TX

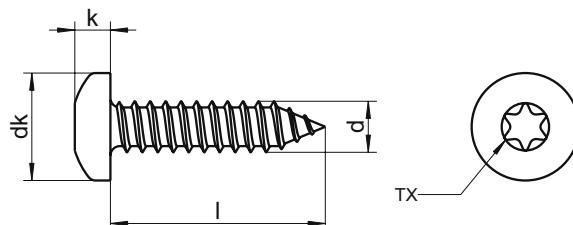

dk k max. ∅	5,6 2,20 TX 10	6,9 2,60 TX 15	7,5 2,80 TX 15	8,2 3,05 TX 20	9,5 3,55 TX 25	10,8 3,95 TX 25	12,5 4,55 TX 30
Length / Ø	ST2,9	ST3,5	ST3,9	ST4,2	ST4,8	ST5,5	ST6,3
6,5 (1/4")	▲●						
9,5 (3/8")	▲●	▲●	▲●	▲●			
13 (1/2")	▲●	▲●	▲●	▲●	▲●	▲●	▲●
16 (5/8")	▲●	▲●	▲●	▲●	▲●	▲●	▲●
19 (3/4")	▲●	▲●	▲●	▲●	▲●	▲●	▲●
22 (7/8")	▲●	▲●	▲●	▲●	▲●	▲●	▲●
25 (1")	▲●	▲●	▲●	▲●	▲●	▲●	▲●
32 (1 1/4")	▲●	▲●	▲●	▲●	▲●	▲●	▲●
38 (1 1/2")	▲●	▲●	▲●	▲●	▲●	▲●	▲●
45 (1 3/4")		▲●	▲●	▲●	▲●	▲●	▲●
50 (2")		▲●	▲●	▲●	▲●	▲●	▲●
60 (2 3/8")			▲●	▲●	▲●	▲●	▲●
SU	1000 ≥ 32 500	1000 ≥ 32 500	1000 ≥ 32 500	500 ≥ 32 200	200 ≥ 32 100	200 ≥ 32 100	200 ≥ 32 100

■ A1 / ▲ A2 / ● A4 | SU: Sales units | All measurements in mm / inch | Other dimensions on request.

Example item no. 9477-2-4,2X38 WS 9477 - A2 - Ø 4,2mm - l = 38mm

Tapping screws with pan head and cross recess H and Z can be found as DIN 7981 and as security screws with TX+PIN as WS 9485 in this catalogue.