


Ähnl. DIN 7982 - **WS 9478** Senk-Blechschraben mit TX-Antrieb

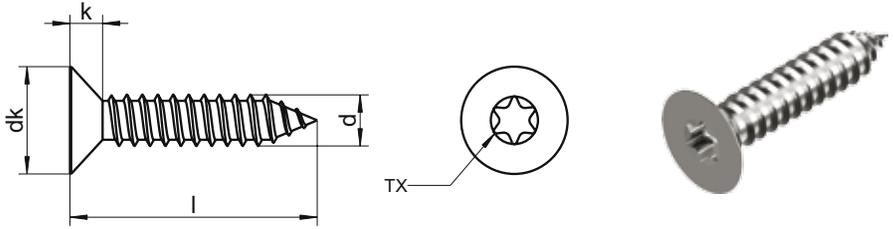

dk	5,5	6,8	7,5	8,1	9,5	10,8	12,4
k max.	1,7	2,1	2,3	2,5	3,0	3,4	3,8
☉	TX 10	TX 15	TX 15	TX 20	TX 25	TX 25	TX 30
Länge / Ø	ST2,9	ST3,5	ST3,9	ST4,2	ST4,8	ST5,5	ST6,3
9,5 (3/8")	▲ ●	▲ ●	▲ ●	▲ ●			
13 (1/2")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
16 (5/8")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
19 (3/4")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
22 (7/8")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
25 (1")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
32 (1 1/4")		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
38 (1 1/2")		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
45 (1 3/4")		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
50 (2")		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
60 (2 3/8")			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
SU	1000	1000 ≥ 32 500	1000 ≥ 32 500	1000 ≥ 32 500	500 ≥ 32 200	200 ≥ 32 100	200 ≥ 32 100

■ A1 / ▲ A2 / ● A4 | VE: Verkaufseinheit | Alle Maße in mm / Zoll | Weitere Abmessungen auf Anfrage
Beispiel Art.-Nr.: 9478-2-4,2X38 WS 9478 - A2 - Ø 4,2mm - l = 38mm