


DIN 934 - sim. ISO 4032

Hexagon nuts

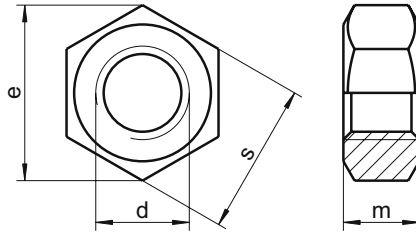

d	m min.	s	e	⌀
M1,4	0,95	3	3,28	3
M1,6	1,05	3,2	3,41	3,2
M1,7	1,15	3,5	3,82	3,5
M2	1,35	4	4,32	4
M2,3	1,55	4,5	4,88	4,5
M2,5	1,75	5	5,45	5
M2,6	1,75	5	5,45	5
M3	2,15	5,5	6,01	5,5
M3,5	2,55	6	6,58	6
M4	2,90	7	7,66	7
M5	3,70	8	8,79	8
M6	4,70	10	11,05	10
M7	5,20	11	12,12	11
M8	6,14	13	14,38	13
M10	7,64	17	18,90	17
M12	9,64	19	21,10	19
M14	10,30	22	24,49	22
M16	12,30	24	26,75	24
M18	14,30	27	29,56	27
M20	14,90	30	32,95	30
M22	16,90	32	35,03	32
M24	17,70	36	39,55	36
M27	20,70	41	45,20	41
M30	22,70	46	50,85	46
M33	24,70	50	55,37	50
M36	27,40	55	60,79	55
M39	29,40	60	66,44	60
M42	32,40	65	71,30	65
M45	34,40	70	76,95	70
M48	36,40	75	82,60	75
M52	40,40	80	88,25	80
M60	46,40	90	99,21	90
M64	49,10	95	104,86	95

Grade	SU
▲●	1000
▲●	1000
▲●	1000
▲●	1000
▲●	1000
▲●	1000
▲●	1000
▲●	1000
▲●	1000
▲●	1000
▲●	1000
▲●	500
▲●	500
▲●	200
▲●	100
▲●	100
▲●	100
▲●	50
▲●	50
▲●	50
▲●	50
▲●	25
▲●	25
▲●	25
▲●	25
▲●	10
▲●	10
▲●	10
▲●	10
▲●	5
▲●	5
▲●	1
▲●	1
▲●	1

■ A1 / ▲ A2 / ● A4 | SU: Sales unit | All measurements in mm | Other dimensions on request.

Example item no. 934-2-10 DIN 934 - A2 - M10

Hexagon nuts DIN 934 with fine pitch thread, left hand thread as well as UNC/UNF, with AD2000-W2 and made of special materials can be found on the following pages. Please note that nuts according to DIN 934 up to M24 will be delivered as standard in A2-70 and A4-80. The material A2-80 can be found on one of the following pages in this catalogue. Hexagon nuts with changed wrench sizes according to ISO 4032 can be found on the following pages.